
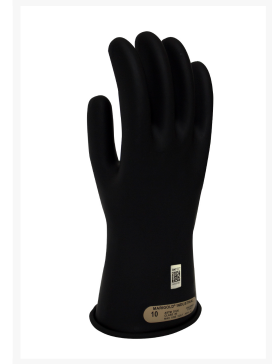


Class 00 ArcGuard Rubber Voltage Gloves

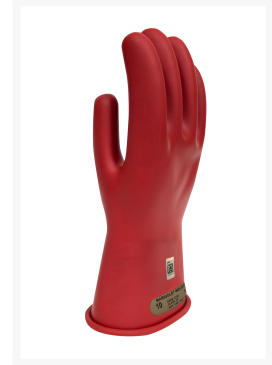

Specs

Product Code GC00_ _ _

Stock Sizes 8-12

Stock Colors 

Fabric / Material Rubber

Compliance

Standards

- NFPA 70E
- CSA Z462
- ANSI/ASTM D120, Class 00, Type 1

Features

Features

- Electrically tested and stamped with the initial test date
- Newly tested before shipment
- Must be put into use within 12 months of test date
- Once gloves are issued for use, they must be tested within 6 months from the date they were distributed to employees
- Should be worn with 10" leather glove protectors to increase the lifespan of the rubber voltage glove
- Leather glove protectors are not required to be marked with a date
- Class 00 - Max Use Voltage 500V AC/750V DC
- Imported

Product Care

Product Care

- Should be cleaned in warm water with mild soap.
- Store flat in a protective bag. Do not fold gloves.
- Avoid high heat and high moisture areas.
- Gloves should not be placed in direct sunlight.
- Keep out of contact with any chemical substance.
- Inspections should occur before each use. Inspection methods are outlined in ASTM F1236.

Sizing Chart

ArcGuard® Rubber Voltage Gloves	
Size	Hand Circumference
8	8" or less
9	8 - 9"
10	9 - 10"
11	10" - 11"
12	11" - 12"