




7800DMV

**1/2" VDE Insulated Sockets 8
mm-32 mm**



PRODUCT DETAILS

- Dip-coated insulation
- 2-Layer colour insulation coating
- For working on live equipment up to 1000 volts acc. to IEC 60900
- Chrome plated and anti-corrosion treated finish
- Made from high performance alloy steel
- Bi-hex profile, metric sizes
- 12 point Dynamic-Drive Profile
- Standards: ISO 2725/1174
- DIN 3124/3120
- 2 Multi-layer coating with different colours indicating safety or danger
- This provides protection as well as creating a visual warning system
- If the outer insulation layer gets damaged, the lighter colour underneath will become visible and warn the user
- Each and every tool is tested to 10.000V for 10 seconds at the end of the manufacturing cycle

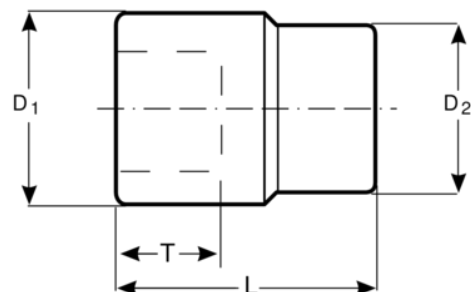

Follow the Fish!



PRODUCT ATTRIBUTES

Product		L	D1	D2	T	
7800DMV-8	8 mm	50 mm	17 mm	22 mm	13 mm	80 g
7800DMV-10	10 mm	50 mm	19.5 mm	22 mm	13 mm	82 g
7800DMV-11	11 mm	50 mm	20.5 mm	22 mm	13 mm	84 g
7800DMV-12	12 mm	50 mm	22 mm	22 mm	13 mm	86 g
7800DMV-13	13 mm	50 mm	23.2 mm	22 mm	13 mm	88 g
7800DMV-14	14 mm	50 mm	24.5 mm	22 mm	13 mm	90 g
7800DMV-15	15 mm	50 mm	25.5 mm	23 mm	17,8 mm	92 g
7800DMV-16	16 mm	50 mm	27 mm	23 mm	17,8 mm	95 g
7800DMV-17	17 mm	50 mm	28.2 mm	24 mm	17,8 mm	98 g
7800DMV-18	18 mm	50 mm	29.5 mm	25 mm	17,8 mm	105 g
7800DMV-19	19 mm	50 mm	30.5 mm	27 mm	17,8 mm	115 g
7800DMV-20	20 mm	50 mm	32 mm	28 mm	17,8 mm	125 g
7800DMV-21	21 mm	50 mm	33.2 mm	29 mm	17,8 mm	135 g
7800DMV-22	22 mm	52 mm	34.5 mm	30 mm	17,8 mm	140 g
7800DMV-24	24 mm	52 mm	37 mm	33 mm	17,8 mm	155 g
7800DMV-27	27 mm	54 mm	40.5 mm	37 mm	17,8 mm	195 g
7800DMV-30	30 mm	56 mm	44.5 mm	40 mm	17,8 mm	210 g
7800DMV-32	32 mm	58 mm	47 mm	43 mm	17,8 mm	225 g

Follow the Fish!

