



SUBMITTAL SHEET

900 Series

COPPERLOC® Non-Removable Copper Push End Coupling
With Stop CxC (½" through 1")

CopperLOC



DESCRIPTION

The CopperLoc® 900 Non-Removable Push Coupling With Stop features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ½", ¾", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)							Wt. (lbs.)
		A	B	C	D	Height	Width	Depth	
10170700	900 ½ CXC	1.53	0.90	0.66	0.15	0.90	1.53	0.90	0.06
10170705	900 ¾ CXC	1.63	1.18	0.72	0.13	1.18	1.63	1.18	0.10
10170710	900 1 CXC	1.57	1.47	0.78	0.11	1.48	1.57	1.48	0.14

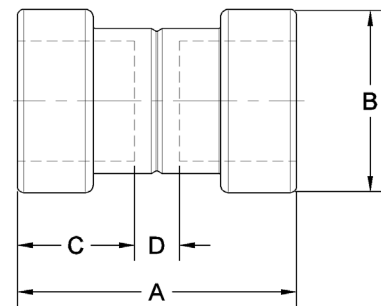

* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181





SUBMITTAL SHEET

901-R Series

COPPERLOC® Non-Removable Copper Push End Reducer Coupling CxC (¾" x ½" through 1" x ¾")

CopperLOC



DESCRIPTION

The CopperLoc® 901-R Non-Removable Push Reducer Coupling features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ¾" x ½", 1" x ½", 1" x ¾"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)								Wt. (lbs.)
		A	B	C	D	E	Height	Width	Depth	
10170715	901-R ¾ x ½ CXC	1.87	1.20	0.72	0.43	0.66	1.20	1.87	1.20	0.11
10170720	901-R 1 x ½ CXC	1.84	1.49	0.78	0.49	0.66	1.48	1.84	1.48	0.15
10170725	901-R 1 x ¾ CXC	1.77	1.49	0.78	0.31	0.72	1.49	1.77	1.49	0.15



* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181






SUBMITTAL SHEET

903 Series

COPPERLOC® Non-Removable Copper Push End Female Adapter CxF (½" through 1")

CopperLOC



DESCRIPTION

The CopperLoc® 903 Non-Removable Push Female Adapter features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ½", ¾", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)						Wt. (lbs.)
		A	B	C	Height	Width	Depth	
10170730	903 ½ CXF	2.24	1.09	0.66	1.09	2.24	1.09	0.13
10170735	903 ¾ CXF	2.64	1.34	0.72	1.34	2.64	1.34	0.24
10170740	903 1 CXF	3.00	1.60	0.78	1.60	3.00	1.60	0.39



* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181






SUBMITTAL SHEET

904 Series

COPPERLOC® Non-Removable Copper Push End Male Adapter CxM (½" through 1")

CopperLOC



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



DESCRIPTION

The CopperLoc® 904 Non-Removable Push Male Adapter features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ½", ¾", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)						Wt. (lbs.)
		A	B	C	Height	Width	Depth	
10170745	904 ½ CXM	1.95	0.91	0.66	0.91	1.95	0.65	0.11
10170750	904 ¾ CXM	2.45	1.20	0.72	1.20	2.45	0.70	0.21
10170755	904 1 CXM	2.72	1.50	0.78	1.50	2.72	0.76	0.34



* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181





SUBMITTAL SHEET

906 Series

COPPERLOC® Non-Removable Copper Push End 45° Elbow
CxC (½" through 1")

CopperLOC



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



DESCRIPTION

The CopperLoc® 906 Non-Removable Push 45° Elbow features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ½", ¾", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)									Wt. (lbs.)
		A	B	C	D	E	F	Height	Width	Depth	
10170760	906 ½ CXC	1.90	1.37	0.66	0.22	0.66	0.22	1.37	1.90	0.90	0.07
10170765	906 ¾ CXC	2.30	1.76	0.72	0.37	0.72	0.37	1.76	2.30	1.17	0.12
10170770	906 1 CXC	2.89	2.20	0.78	0.58	0.78	0.58	2.20	2.89	1.48	0.23

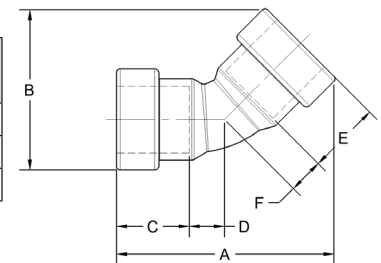

* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181





SUBMITTAL SHEET

906-2 Series

COPPERLOC® Non-Removable Copper Push End 45° Street Elbow FTGxC (½" through 1")

CopperLOC



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



DESCRIPTION

The CopperLoc® 906-2 Non-Removable Push 45° Street Elbow features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ½", ¾", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)									Wt. (lbs.)
		A	B	C	D	E	F	Height	Width	Depth	
10170775	906-2 ½ FTGXC	1.90	1.42	0.66	0.22	0.83	1.20	1.42	1.90	0.90	0.06
10170780	906-2 ¾ FTGXC	2.35	1.80	0.72	0.32	0.84	1.31	1.80	2.35	1.18	0.10
10170785	906-2 1 FTGXC	2.77	2.12	0.78	0.38	1.06	1.62	2.12	2.77	1.49	0.20



* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181





SUBMITTAL SHEET

907 Series

COPPERLOC® Non-Removable Copper Push End 90° Elbow
CxC (½" through 1")

CopperLOC



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



DESCRIPTION

The CopperLoc® 907 Non-Removable Push 90° Elbow features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ½", ¾", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)									Wt. (lbs.)
		A	B	C	D	E	F	Height	Width	Depth	
10170790	907 ½ CXC	1.80	1.80	0.66	0.76	0.66	0.76	1.80	1.80	0.91	0.09
10170795	907 ¾ CXC	2.28	2.28	0.72	1.16	0.72	1.16	2.28	2.28	1.18	0.14
10170800	907 1 CXC	2.75	2.75	0.78	1.25	0.78	1.25	2.75	2.75	1.49	0.27



* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181





SUBMITTAL SHEET

907-2 Series

COPPERLOC® Non-Removable Copper Push End 90° Street Elbow FTGxC (½" through 1")

CopperLOC



DESCRIPTION

The CopperLoc® 907-2 Non-Removable Push 90° Street Elbow features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ½", ¾", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)								Wt. (lbs.)	
		A	B	C	D	E	F	Height	Width		Depth
10170805	907-2 ½ FTGXC	1.66	1.92	0.66	0.73	0.71	1.50	1.92	1.66	0.90	0.07
10170810	907-2 ¾ FTGXC	2.17	2.40	0.72	1.17	0.80	1.91	2.40	2.17	1.18	0.12
10170815	907-2 1 FTGXC	2.64	2.96	0.78	1.37	0.89	2.13	2.96	2.64	1.49	0.23



* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181






SUBMITTAL SHEET

9707-3-5 Series

COPPERLOC® Non-Removable Copper Push End 90° Female Drop Ear Elbow CxF (1/2")

CopperLOC



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



DESCRIPTION

The CopperLoc® 9707-3-5 Non-Removable Push 90° Female Drop Ear Elbow features a Lead-Free dezincification resistant copper body, Lead-Free bronze female end, Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- 1/2"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Push Body	UNS C12200 Copper
Female End Body	UNS C89836 LF Bronze
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)								Wt. (lbs.)
		A	B	C	D	E	Height	Width	Depth	
10170835	9707-3-5 1/2 CXF	2.56	1.24	0.66	1.31	0.81	1.24	2.56	2.01	0.26



* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181





SUBMITTAL SHEET

907-3 Series

COPPERLOC® Non-Removable Copper Push End 90° Female Elbow CxF (½" through 1")

CopperLOC



DESCRIPTION

The CopperLoc® 907-3 Non-Removable Push 90° Female Elbow features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ½", ¾", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)								Wt. (lbs.)
		A	B	C	D	E	Height	Width	Depth	
10170820	907-3 ½ CXF	1.87	2.74	0.66	0.79	2.39	2.74	1.87	1.19	0.16
10170825	907-3 ¾ CXF	2.32	3.49	0.72	1.15	2.85	3.49	2.32	1.34	0.28
10170830	907-3 1 CXF	2.82	4.04	0.78	1.53	3.35	4.04	2.82	1.63	0.49



* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181






SUBMITTAL SHEET

907-4 Series

COPPERLOC® Non-Removable Copper Push End 90° Male Elbow CxM (½" through 1")

CopperLOC



DESCRIPTION

The CopperLoc® 907-4 Non-Removable Push 90° Male Elbow features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ½", ¾", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)								Wt. (lbs.)
		A	B	C	D	E	Height	Width	Depth	
10170840	907-4 ½ CXM	1.79	2.56	0.66	0.75	2.15	2.56	1.79	0.91	0.14
10170845	907-4 ¾ CXM	2.26	3.18	0.72	1.15	2.60	3.18	2.26	1.20	0.25
10170850	907-4 1 CXM	2.77	3.83	0.78	1.41	3.13	3.83	2.77	1.46	0.43

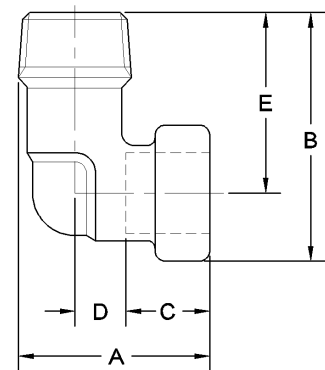

* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181





SUBMITTAL SHEET

911 Series

COPPERLOC® Non-Removable Copper Push End Tee
CxXcX (1/2" through 1")

CopperLOC



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



DESCRIPTION

The CopperLoc® 911 Non-Removable Push Tee features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- 1/2", 3/4", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)										Wt. (lbs.)	
		A	B	C	D	E	F	G	H	Height	Width		Depth
10170855	911 1/2 CXCXC	2.31	1.60	0.66	0.45	0.66	0.45	0.66	0.45	1.60	2.31	0.90	0.13
10170860	911 3/4 CXCXC	2.69	1.90	0.72	0.63	0.72	0.63	0.72	0.59	1.90	2.69	1.17	0.19
10170865	911 1 CXCXC	2.86	2.18	0.78	0.72	0.78	0.72	0.78	0.75	2.18	2.86	1.49	0.33



* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181





SUBMITTAL SHEET

911-R Series

COPPERLOC® Non-Removable Copper Push End Reducing Tee CxCxC (¾"x¾"x½" through 1"x1"x¾")

CopperLOC



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



DESCRIPTION

The CopperLoc® 911-R Non-Removable Push Reducing Tee features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- ¾"x¾"x½"; 1"x1"x½"; 1"x1"x¾"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)											Wt. (lbs.)
		A	B	C	D	E	F	G	H	Height	Width	Depth	
10170870	911-R ¾X¾X½ CXCXC	2.13	1.75	0.72	0.42	0.72	0.42	0.66	0.64	1.75	2.13	1.19	0.16
10170875	911-R 1X1X½ CXCXC	2.27	2.05	0.78	0.36	0.78	0.36	0.66	0.75	2.05	2.27	1.60	0.26
10170880	911-R 1X1X¾ CXCXC	2.55	2.16	0.78	0.52	0.78	0.52	0.72	0.80	2.16	2.55	1.60	0.30



* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181





SUBMITTAL SHEET

917 Series

COPPERLOC® Non-Removable Copper Push End Cap
C (1/2" through 1")

CopperLOC



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



DESCRIPTION

The CopperLoc® 917 Non-Removable Push Tube Cap features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

- CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

- 1/2", 3/4", 1"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	Stainless Steel
Support Ring	Nylon
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Size (in.)	Dimensions (in.)						Wt. (lbs.)
		A	B	C	Height	Width	Depth	
10170885	917 1/2	0.95	0.90	0.66	0.90	0.95	0.90	0.04
10170890	917 3/4	1.02	1.18	0.72	1.18	1.02	1.18	0.06
10170895	917 1	1.21	1.50	0.78	1.50	1.21	1.50	0.12

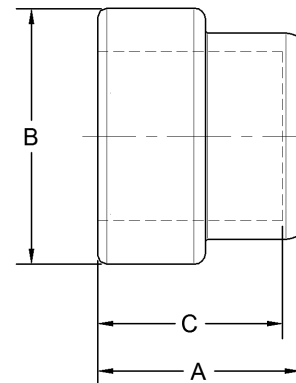

* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514 USA
www.elkhartproducts.com | (574) 264-3181

