



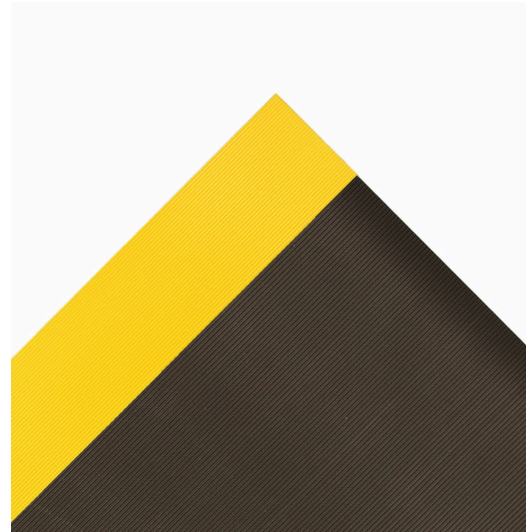

830 Switchboard Matting - Corrugated

Non-conductive PVC corrugated top surface switchboard mat prevents the worker from being grounded

Corrugated Switchboard Matting is a non-conductive floor matting made from a PVC compound, designed to provide insulation for the worker. The mat prevents the worker from being grounded, thereby eliminating the possibility of electrical shock. The corrugated saw-tooth top surface provides increased traction and is easy to sweep clean. Switchboard matting is intended for use in dry environments in front of high voltage boxes, electrical fuse boxes, and transformers.

- Electrically Insulative Type 2 PVC compound
- Insulated matting engineered to protect workers from electric shock
- Corrugated top surface - Added traction and easy to sweep clean
- Each square foot of this matting is tested in conformance with ANSI/ASTM D-178 specifications
- Class 2 Di-electric Strength: 30,000 volts
- Proof test of 20,000 volts
- Recommended maximum use voltage: 17,000



Roll Sizes	2'x75', 3'x75', 4'x75'
Cut Lengths	2', 3' and 4' widths (up to 75' long)
Thickness	1/4"
Colors	 Black  Black/Yellow
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Environment	Dry Areas
Usage Intensity	Heavy duty
Sales Tip	It is highly recommended that the mat be replaced every 12 months for optimum performance
Material	PVC
Product Weight sqft in lbs	1.7
Process	Calendering
Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Prop 65 Warning	WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov