

## 39 - Metric short-reach combination wrenches




### Standards:

NF ISO 691, NF ISO 7738, NF ISO 3318, NF ISO 1711-1, E74-306, ISO 691, ISO 7738, ISO 3318, ISO 1711-1, DIN ISO 691, DIN 1711-1, ASME B107.100

### Description:

- Short combination wrenches: the short handle and compact head allow for high handiness. Ideal for confined access.
- OGV® profile with 12-point ring for powerful tightening while protecting the nut. H suffix = 6-point ring.
- Ring head angled at 15°.
- Open end head angled at 15°.
- Metric sizes: 3.2 to 17 mm.
- Presentation: satin chrome finish.

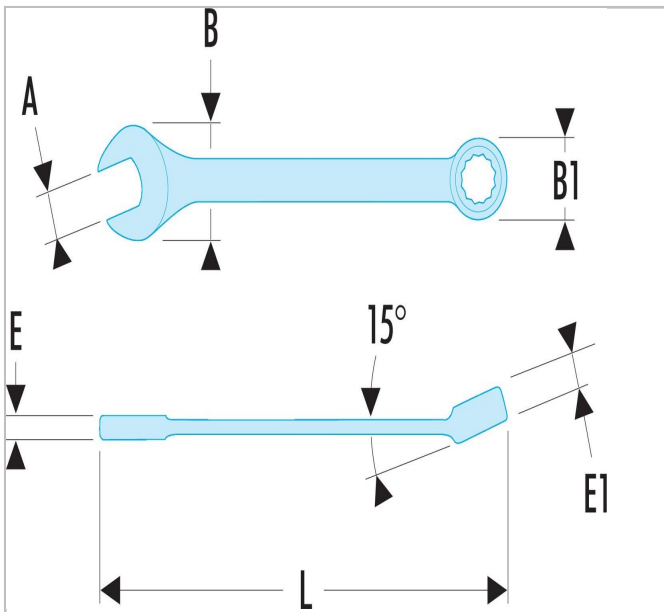

|  | A [mm] | Length<br>L<br>[mm] | Thickness<br>E [mm] | Thickness<br>E1 [mm] | Head<br>Width<br>B<br>[mm] | Weight<br>[Kg] | Hex<br>Size<br>[mm] |
|----------------------------------------------------------------------------------|--------|---------------------|---------------------|----------------------|----------------------------|----------------|---------------------|
| 39.10                                                                            | 10     | 103.0               | 5.1                 | 6,4                  | 22                         | 0              | 12.0                |
| 39.11                                                                            | 11     | 109.0               | 5.3                 | 6,8                  | 24                         | 0              | 12.0                |
| 39.12                                                                            | 12     | 127.0               | 5.5                 | 7,5                  | 26                         | 0              | 12.0                |
| 39.13                                                                            | 13     | 141.0               | 5.8                 | 8                    | 28                         | 0              | 12.0                |
| 39.14                                                                            | 14     | 147.0               | 6.0                 | 8,5                  | 30                         | 0              | 12.0                |
| 39.15                                                                            | 15     | 152.0               | 6.4                 | 9                    | 32                         | 0              | 12.0                |
| 39.16                                                                            | 16     | 158.0               | 6.7                 | 9,6                  | 34                         | 0              | 12.0                |
| 39.17                                                                            | 17     | 165.0               | 6.9                 | 10                   | 36                         | 0              | 12.0                |
| 39.3.2H                                                                          | 3,2    | 77.0                | 3.1                 | 3,1                  | 10                         | 0              | 6.0                 |
| 39.4H                                                                            | 4      | 77.0                | 3.1                 | 3,1                  | 10                         | 0              | 6.0                 |
| 39.5.5H                                                                          | 5,5    | 84.0                | 3.5                 | 4                    | 12                         | 0              | 6.0                 |
| 39.5H                                                                            | 5      | 82.0                | 3.5                 | 4                    | 12                         | 0              | 6.0                 |
| 39.6                                                                             | 6      | 90.0                | 4.1                 | 5                    | 15                         | 0              | 12.0                |
| 39.7                                                                             | 7      | 90.0                | 4.1                 | 5                    | 15                         | 0              | 12.0                |
| 39.8                                                                             | 8      | 94.0                | 4.5                 | 5,8                  | 17                         | 0              | 12.0                |
| 39.9                                                                             | 9      | 98.0                | 4.8                 | 6                    | 19                         | 0              | 12.0                |