


## Disposable gloves with chemical splash protection, for food processing and heavy-duty handling

- **Reliable chemical splash protection:** TouchNTuff® 92-675 disposable gloves offer protection against accidental exposure when handling a range of chemicals
- **Improved durability:** A strong, proprietary nitrile formulation gives gloves extra resilience for more durable protection in food handling, lab work or heavy-duty jobs
- **Elevated comfort:** The soft nitrile formulation enhances comfort during long work days
- **Food handling compliance:** These gloves are suitable for a wide range of food processing applications
- **Enhanced grip:** Textured fingertips allow wearers to securely handle objects and equipment

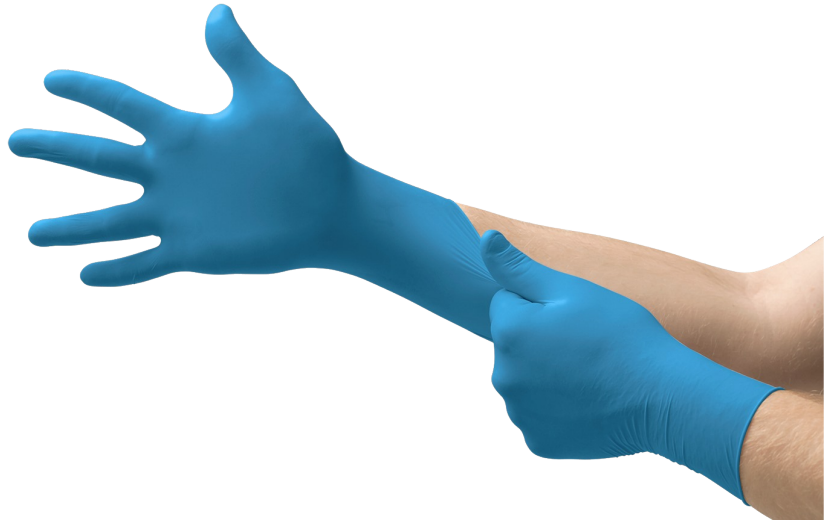

### Industries

- Life Sciences
- Chemical
- Food Processing

### Recommended For

- Transferring liquids and solids
- Sample taking and processing
- Handling incoming goods
- Maintenance
- All food processing, applications that have food contact

# TECHNICAL DATA SHEET

Product Information	
Material	Nitrile
External Glove Surface	Textured Fingers
Audit Standards	ISO 9001
Product Certification	Category III, EN ISO 21420:2020, EN ISO 374-1:2016 Type B JKPT, EN ISO 374-5:2016 Virus, FDA21 CFR 177-2600-US Food Contact Approved, EU Food Contact Approved, ISO 9001, MT11: CLASSE B
Packaging Overview	S-XXL: 100 gloves per dispenser, 10 dispensers per case, 1000 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Thailand
Product Segmentation	Robust
Antistatic	Yes
Silicone Free	Yes

## PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	240 / 9.5		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.11/ 4.3		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.14/ 5.5		ASTM D3767,EN 420
	<b>BEFORE AGING</b>	<b>AFTER AGING</b>	
Ultimate Tensile Strength (MPa)	≥14	≥14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	≥ 6	≥ 6	EN 455-2

## ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	565716	565717	565718	565719	92675110

## Performance Standards and Regulatory Compliance



## For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

### Asia Pacific Region

MY +603 8310 6688  
apac.medical@ansell.com  
CN: +86 21 38275000  
infochina@ansell.com  
JP: +813 5549 8151  
info.medical.jp@ansell.com

### North America Region

Ansell Healthcare Products LLC  
T: +1 800 800 0444  
F: +1 800 800 0445

### Latin America & Caribbean Region

BR +55 (11) 3356-3100  
latam.medical@ansell.com  
MX: +52 442 296 2050  
latam.medical@ansell.com  
CO: +57 1 288 3247  
latam.medical@ansell.com

### Australia

Ansell Limited  
T: +61 1800 337 041  
F: +61 1800 803 578

### Russia

Ansell PYC  
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

