




## 3/8" DRIVE SOCKET FLEXTENSIONS

Williams Flexextension are used extensively in engine and heavy equipment manufacturing, assembly and repair. They increase productivity by featuring an integrated (non-removable) design of the drive extension and socket to allow for reliable, continuous work without concern for the socket disconnecting from the extension as could happen with hand-tool type ball retained sockets.

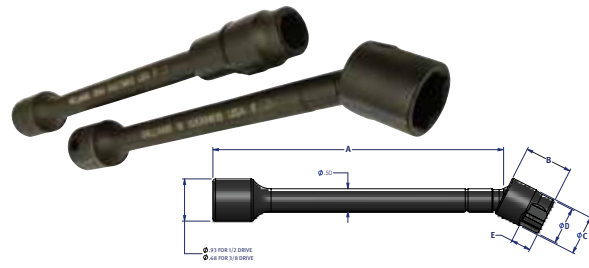

## 3/8" DRIVE SOCKET FLEXTENSIONS, METRIC

### Black Industrial Finish

Product Code	Drive	A		Tension	Socket Points	Socket (mm)	B		C	D	E
		Shank Length					Socket Length	Socket Diameter	Socket Nose Diameter	Socket Hex Depth	
ISFXTM410	3/8"	4.57"/116.1MM		Yes	6	10	1.06"/26.9MM	0.90"/22.7MM	0.63"/16.0MM	0.28"/7.1MM	
ISFXM410	3/8"	4.57"/116.1MM		No	6	10	1.06"/26.9MM	0.90"/22.7MM	0.63"/16.0MM	0.28"/7.1MM	
ISFXTM610	3/8"	6.57"/166.9MM		Yes	6	10	1.06"/26.9MM	0.90"/22.7MM	0.63"/16.0MM	0.28"/7.1MM	
ISFXM610	3/8"	6.57"/166.9MM		No	6	10	1.06"/26.9MM	0.90"/22.7MM	0.63"/16.0MM	0.28"/7.1MM	
ISFXTM412	3/8"	4.57"/116.1MM		Yes	6	12	1.06"/26.9MM	0.90"/22.7MM	0.76"/19.3MM	0.34"/8.6MM	
ISFXM412	3/8"	4.57"/116.1MM		No	6	12	1.06"/26.9MM	0.90"/22.7MM	0.76"/19.3MM	0.34"/8.6MM	
ISFXTM612	3/8"	6.57"/166.9MM		Yes	6	12	1.06"/26.9MM	0.90"/22.7MM	0.76"/19.3MM	0.34"/8.6MM	
ISFXM612	3/8"	6.57"/166.9MM		No	6	12	1.06"/26.9MM	0.90"/22.7MM	0.76"/19.3MM	0.34"/8.6MM	
ISFXTM413	3/8"	4.57"/116.1MM		Yes	6	13	1.06"/26.9MM	0.90"/22.7MM	0.76"/19.3MM	0.34"/8.6MM	
ISFXM413	3/8"	4.57"/116.1MM		No	6	13	1.06"/26.9MM	0.90"/22.7MM	0.76"/19.3MM	0.34"/8.6MM	
ISFXTM613	3/8"	6.57"/166.9MM		Yes	6	13	1.06"/26.9MM	0.90"/22.7MM	0.76"/19.3MM	0.34"/8.6MM	
ISFXM613	3/8"	6.57"/166.9MM		No	6	13	1.06"/26.9MM	0.90"/22.7MM	0.76"/19.3MM	0.34"/8.6MM	
ISFXTM415	3/8"	4.57"/116.1MM		Yes	6	15	1.06"/26.9MM	0.90"/22.7MM	0.88"/22.4MM	0.42"/10.7MM	
ISFXM415	3/8"	4.57"/116.1MM		No	6	15	1.06"/26.9MM	0.90"/22.7MM	0.88"/22.4MM	0.42"/10.7MM	
ISFXTM615	3/8"	6.57"/166.9MM		Yes	6	15	1.06"/26.9MM	0.90"/22.7MM	0.88"/22.4MM	0.42"/10.7MM	
ISFXM615	3/8"	6.57"/166.9MM		No	6	15	1.06"/26.9MM	0.90"/22.7MM	0.88"/22.4MM	0.42"/10.7MM	
ISFXTM416	3/8"	4.57"/116.1MM		Yes	6	16	1.06"/26.9MM	0.90"/22.7MM	0.90"/22.7MM	0.45"/11.4MM	
ISFXM416	3/8"	4.57"/116.1MM		No	6	16	1.06"/26.9MM	0.90"/22.7MM	0.90"/22.7MM	0.45"/11.4MM	
ISFXTM616	3/8"	6.57"/166.9MM		Yes	6	16	1.06"/26.9MM	0.90"/22.7MM	0.90"/22.7MM	0.45"/11.4MM	
ISFXM616	3/8"	6.57"/166.9MM		No	6	16	1.06"/26.9MM	0.90"/22.7MM	0.90"/22.7MM	0.45"/11.4MM	

### Features

- Made in the U.S.A.
- Durable black oxide finish.
- Socket retention pin is TIG welded, providing full rotation power to the socket.
- Sockets feature SUPERTORQUE® lobular openings for greater turning power without deforming the fastener.
- Drive end has a 7/32" cross hole & bevel for ease of use.

- Up to 30 degree angle offset.
- Flexextensions are designed for use on hand and power tools (Impulse or Direct drive); NOT FOR IMPACT TOOL USE.
- Maximum working torque values: 160 Ft. Lbs. /1920 In. Lbs. /217 Nm
- Other lengths and socket sizes available by special order. Contact your Snap-on Industrial Brands representative.
- See pages 362 to 364 for 1/2" Drive Socket Flexextensions.



## 3/8" DRIVE HAND IMPACT DRIVER

### Black Industrial Finish

Product Code	Length (Inches)	Shank Diameter (Inches)
BHMD-30	5	1 1/4

### Features

- Specially heat treated for impact use to provide long life, safety, and durability.
- Ball socket retention for fast socket changes.
- Ideal for loosening screws that cannot be loosened with an ordinary screwdriver.
- Impact driver is struck with a hammer to provide turning power.
- Hammer blow forces bit into screw head to reduce stripping.
- Hand impact driver can be used with all 3/8" drive sockets, such as 6-point and hex-bit sockets.



BHMD-30

3/8" DRIVE



## 7 PIECE 3/8" DRIVE IMPACT DRIVER SET

### Packed in Exclusive Keep-Safe-Foam System

Product Code	Description
WSBHMD-7	7 Piece Impact Driver Set

### Contents Include:

Product Code	Description	Product Code	Description
BHMD-30	Hand Impact Driver	BA-7A-2P	#2 Phillips® Bit Socket
BA-7A-2S	7/32" x .040" Slotted Bit Socket	BA-10A-3P	#3 Phillips® Bit Socket
BA-10A-3S	9/32" x .045" Slotted Bit Socket	BA-12A-4P	#4 Phillips® Bit Socket
BA-10A-4S	5/16" x .055" Slotted Bit Socket		

### Features

- Ideal for loosening screws that cannot be loosened with an ordinary screwdriver.
- Impact driver is struck with a hammer to provide turning power.
- Hammer blow forces bit into screw head to reduce stripping.
- Hand impact driver can be used with all 3/8" drive sockets, such as 6-point and hex-bit sockets.



WSBHMD-7



SOCKETS AND DRIVE TOOLS